




TUSKBOND G500 Premium High Solids Contact Adhesive

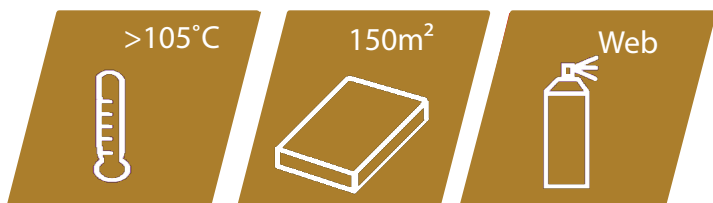

FEATURES:

- UNIFORM SPRAY • FAST EASY APPLICATION
- FAST DRYING • HIGH SOLIDS
- HIGH TEMPERATURE RESISTANCE
- LOW ODOUR • LONG OPEN TIME
- BOND A WIDE VARIETY OF SUBSTRATES

PRODUCT DESCRIPTION:

Tuskbond G500 will bond a wide variety of substrates, including wood, metals, rubber, fabric, most plastics, cardboard, polythene and concrete, as well as decorative laminates. It is ideal for permanent bonds that require good initial bond strength.

It has excellent grab, a long open time and dries to a tack-free film which helps to prevent unwanted transfer of adhesive. The high solids content reduces the risks of under applying. Always test a small sample of the materials first to ensure the suitability of the product for the application. For instance, some vinyls contain large amounts of plasticiser which, over time, can migrate and soften the bond. When in doubt, test first. Do not use on flexible PVC or expanded polystyrene.

TECHNICAL SPECIFICATION

Property

Tuskbond G500

Solvent	Dichloromethane
Propellant	Hydrocarbon
Solids Content (approx)	35-40%
Spray Pattern	Web
Colour	Clear or Red
Coverage (17kg Canister)	~ 150m ²
VOC	659g/l
Shear Adhesion Failure Temp	>105°C
Wheelmark Approved	Yes
Available Sizes	17kg, 85kg

STORAGE:

Protect from extremes of temperature in a controlled environment between 15 and 35°C, and away from direct sunlight. Do not stand on a cold concrete floor. Low temperatures can result in irreparable separation of the adhesive. If the adhesive sprays like a jet, the canister is too cold. Warm to at least 10°C before using.

DO NOT ALLOW THE PRODUCT TO FREEZE

Stored under the correct conditions, in original, unopened containers, the product will have a shelf life of 12 months.





/// G500



TECHNICAL DATA SHEET

DIRECTIONS FOR USE:

- Surfaces should be clean, dry and free from grease, oil and dust. Excessive dust will impair performance. For best results the substrate and product should be bonded at temperatures between 15°C and 25°C.
- Attach a suitable spray nozzle, such as a Unijet 6501, to the spray gun.
- Connect the hose to the canister and the spray gun to the hose and tighten the connections. If there are any leaks, tighten the connection at the source of the leak.
- Open the valve on the canister. The valve should remain open until the canister is used up. Use the locking nut on the gun after use. Turning off the valve will result in the adhesive drying in the hose and gun causing blockages.
- Hold the spray gun 10-20cm away at 90° to the surface and apply a uniform coat of adhesive, to both substrates, ensuring 80-100% coverage. Spray one surface vertically the other horizontally. Pay particular attention to the edges.
- When the adhesive is dry to the touch it is ready for the bond to be made.
- Porous substrates may require two applications
- Drying takes approximately 1 to 2 minutes depending on substrates, ambient temperature and humidity. Over spraying and pooling of the adhesive will increase the drying time and may cause the adhesive to show through the laminate.
- After spraying, remove the spray gun tip and rinse with Solvent Cleaner before it has cured.
- It is important to remember that Tuskbond G500 is a contact adhesive and forms a bond by sticking to itself, so there must be sufficient adhesive on both surfaces for this to happen.
- Allow the adhesive to tack up and protect from contamination whilst this happens. The adhesive is ready to bond when it feels dry to the touch and does not transfer.
- Once the two surfaces have been brought together, and aggressive bond will be made. Spacers can be used to ensure the surfaces do not come into contact prematurely.
- Once the two surfaces are brought together, apply a uniform pressure over the work piece, starting in the middle and working outwards. Use blocks or a 3 inch roller and ensure the whole piece has been worked to ensure adequate contact of the adhesive.
- Pay particular attention to the edges. Please note that testing at this point by lifting the edge will weaken the bond. A nip roller will give the best results.
- Once assembled, the piece can be machined or trimmed as required.
- Full cure will take 24 hours.
- Keep the valve open and the hose attached to the canister until there is no more adhesive. If the hose is removed, clean through with solvent cleaner to prevent adhesive drying, which will cause the gun and hose to block. Turn the canister off before removing the hose.

DISCLAIMER

All the information in the Data Sheet is based on practical experience and is published in good faith. However, because we have no control over the manner or conditions in which our products are used, or over work undertaken or end product manufactured by the purchaser, we cannot accept liability for results. Responsibility for ascertaining the suitability of products for his purposes rests with the purchaser. All conditions, representations, statements, warranties or guarantees whatsoever, whether express, implied or statutory, in respect of any goods manufactured, sold or supplied by us are hereby expressly excluded and we accept no liability in respect of any claim for damage or consequential loss caused to any property arising directly or indirectly out of the use of our products or goods.